

The following page(s) are extracted from multi-page Kuhnke product catalogues or CDROMs and any page number shown is relevant to the original document. The PDF sheets here may have been combined to provide the fullest possible technical information about the specific product(s) you have selected. In the original hard copy catalogues the data may have been in more than one section.

Hard copy product catalogues, and CDROMs have been published describing Kuhnke Pneumatics, Solenoids, Relays and Electronics; some divided into different books. A list of current publications is available on the main Kuhnke website [www.kuhnke.co.uk](http://www.kuhnke.co.uk) or from our sales offices.

## Contact Details

Kuhnke sales and service in the UK & Republic of Ireland.

H. Kuhnke Ltd  
Unit 21 Abbey Enterprise Centre  
Premier Way  
Romsey  
Hampshire  
SO51 9AQ  
Great Britain

T: +44 (0)1794 514445

F: +44 (0)1794 513514

Email: [sales@kuhnke.co.uk](mailto:sales@kuhnke.co.uk)

Website: [www.kuhnke.co.uk](http://www.kuhnke.co.uk)




Worldwide delivery service available.

### Important Note

The information shown in these documents is for guidance only. No liability is accepted for any errors or omissions. The designer or user is solely responsible for the safe and proper application of the parts, assemblies or equipment described.




---

## Socket Z316.01






Socket	Z316.01
Socket design	Safe separation
Terminal capacity	Soldered pins
Mounting	PCB mount
Nominal current	12 A
Insulation group VDE 0110b/2.79	C250
Weight	approx. 3.5 g
Retaining spring	Z420

## Socket Z317.01






Socket	Z317.01
Socket design	Safe separation
Terminal capacity	Soldered pins
Mounting	PCB mount
Nominal current	12 A
Insulation group VDE 0110b/2.79	C250
Weight	approx. 3.5 g
Retaining spring	Z420

## Socket Z318.02

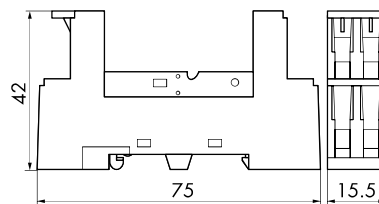




Socket	Z318.02
Socket design	Safe separation, logical, additional modules supported
Terminal capacity	
solid conductor	2 x 2.5 mm <sup>2</sup>
flexible conductor with ferrule	2 x 1.5 mm <sup>2</sup>
Terminal designation	in accordance with EN50005
Mounting	Rail EN50022-3.5 x 7.5/15 Screw mounting M3
Screw terminals	Head screws metric M3
Torque in accordance with DIN EN 60999	0.5 Nm
Nominal current	12 A
Insulation group VDE 0110b/2.79	C250, B380
Electrical shock protection	in accordance with VBG4 (professional association), VDE 0106 part 100
Weight	22 g
Eject/retain clip	Z438 for 171 G1

## Socket Z319.02

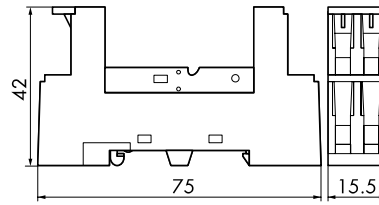




Socket	Z319.02
Socket design	logical, additional modules supported
Terminal capacity	
solid conductor	2 x 2.5 mm <sup>2</sup>
flexible conductor with ferrule	2 x 1.5 mm <sup>2</sup>
Terminal designation	in accordance with EN50005
Mounting	Rail EN50022-35 x 7.5/15 Screw mounting M3
Screw terminals	Head screws metric M3
Torque in accordance with DIN EN 60999	0.5 Nm
Nominal current	12 A
Insulation group VDE 0110b/2.79	C250, B380
Electrical shock protection	in accordance with VBG4 (professional association), VDE 0106 part 100
Weight	22 g
Eject/retain clip	Z438

## Socket Z315.02

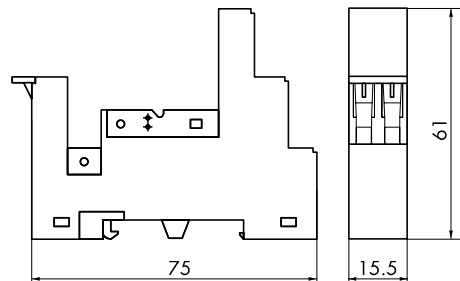


Socket	Z315.02
Socket design	Safe separation, logical, additional modules supported
Terminal capacity	
solid conductor	2 x 2.5 mm <sup>2</sup>
flexible conductor with ferrule	2 x 1.5 mm <sup>2</sup>
Terminal designation	in accordance with EN50005
Mounting	Rail EN50022-35 x 7.5/15 Screw mounting M3
Screw terminals	Head screws metric M3
Torque in accordance with DIN EN 60999	0.5 Nm
Nominal current	12 A
Insulation group VDE 0110b/2.79	C250, B380
Electrical shock protection	in accordance with VBG4 (professional association), VDE 0106 part 100
Weight	43 g
Eject/retain clip	Z438

## Modules for Socket Z318.02, Z319.02, and Z315.02




Z318.51

Protection / luminous diode for 6 - 24 VDC



Z318.52

LED for 6 - 24 VAC / DC



Z318.53

Protection diode




Z318.54

Varistor for 24 VAC



Z318.55

Varistor for 230 VAC



Z318.58

LED for 110 / 230 VAC

---

## Eject/retain Clip Z438 (for Z318.02, Z319.02, and Z315.02)

