


»» Specification

Contact material	AgSnO alloy	
Contact voltage drop ⁽¹⁾	Typ. 50mV at 10A	
Operate time ⁽¹⁾	10ms Max.	
Release time ⁽¹⁾	10ms Max.	
Insulation resistance ⁽¹⁾	50MΩ Min. (DC 500V)	
Dielectric strength ⁽¹⁾	Between open contact	: AC 500V , 50/60Hz 1 min.
	Between contact and coil	: AC 500V , 50/60Hz 1 min.
Vibration resistance	10~55Hz , amplitude 2.0mm	
Shock resistance	Operating extremes	10G
	Damage limits	100G
Life expectancy	Mechanical	5,000,000 operations Min. (frequency 18,000 operations/hr)
	Electrical	100,000 operations Min. (frequency 1,200 operations/hr)
Operating temperature	-30~+85 °C (no freezing)	
Weight	Approx. 35 g	


Note:(1)Initial value

»» Outline Dimensions


◆804 (C)

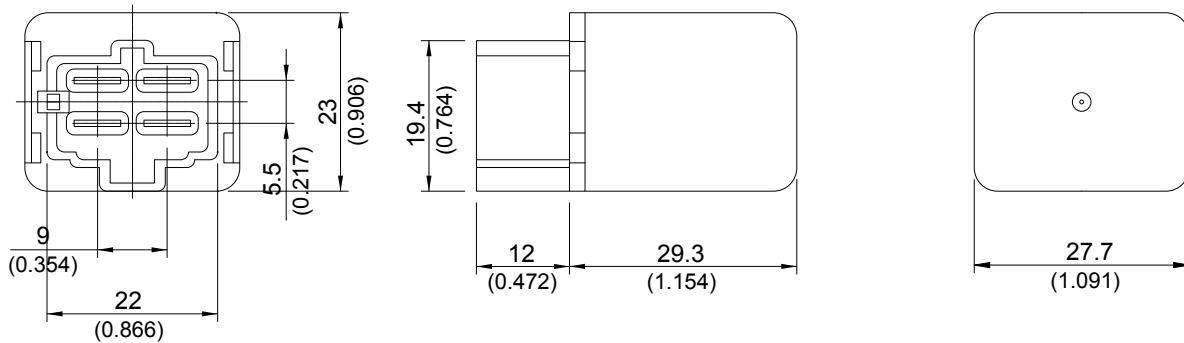

◆804 (C1)

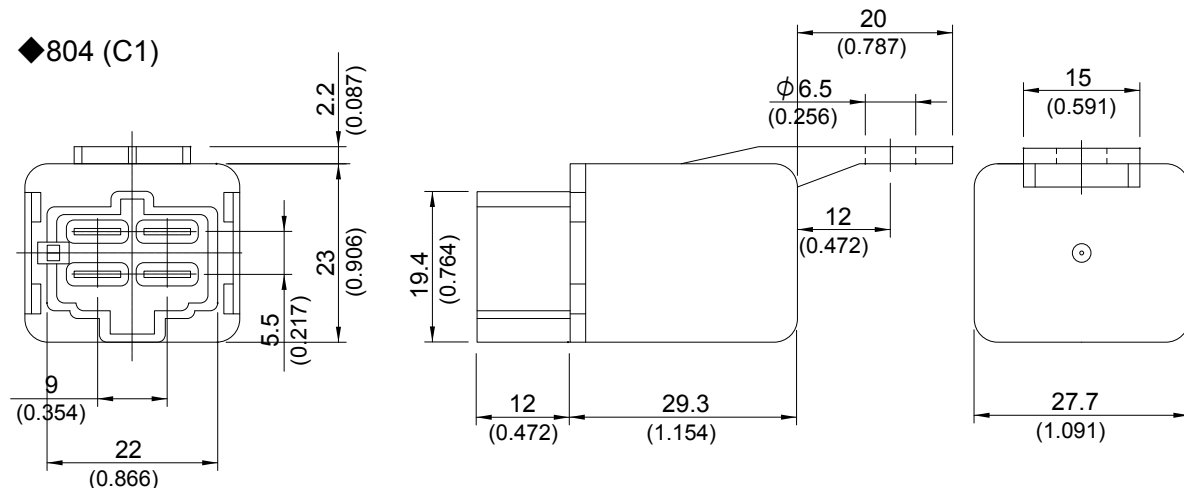

»» Wiring Diagram BOTTOM VIEW

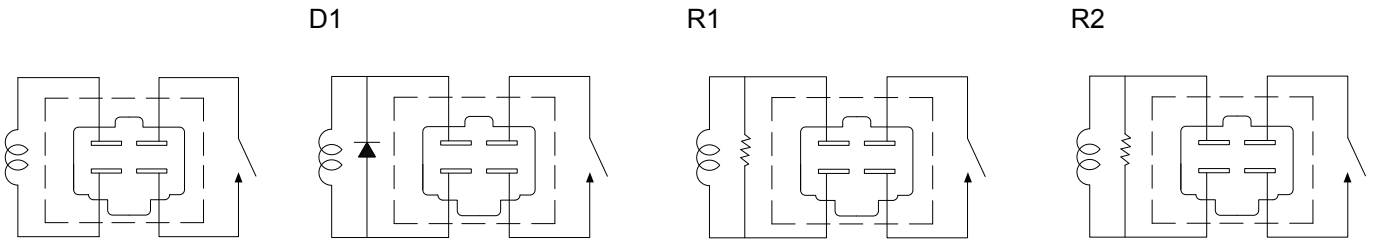

»» Engineering Data

