



### »» Features

- Forcibly guided contacts according to EN50205.
- 2 pole safety relay with "DPDT "or "SPNO & SPNC" contacts.
- Epoxy sealed type and sealed flux free are both available.
- Emergency shut-off, machine control, elevator and escalator control, light barrier control.

### »» Type List

Terminal style	Contact form	Designation (provided with)		
		Flux tight	Sealed type	Sealed type washable
PCB terminal	2C (DPDT)	S01-2CH-F-C	S01-2CH-F-V	S01-2CH-F-S
		S01-2CHA-F-C	S01-2CHA-F-V	S01-2CHA-F-S
	2D (SPNO & SPNC)	S01-2DH-F-C	S01-2DH-F-V	S01-2DH-F-S
		S01-2DHA-F-C	S01-2DHA-F-V	S01-2DHA-F-S

### »» Ordering Information

S01 - 2C H - F - C  
 1 2 3 4 5

- |        |   |          |                         |
|--------|---|----------|-------------------------|
| 1. S01 | -- Basic series designation                               | 4. Blank | -- Standard type        |
| 2. 2C  | -- Double pole double throw                               | F        | -- Class F              |
| 2D     | -- Single pole normally open & single pole normally close | 5. C     | -- Flux tight           |
| 3. H   | -- Contact material AgSnO                                 | V        | -- Sealed type          |
| HA     | -- Contact material AgSnO+ Au                             | S        | -- Sealed type washable |

### »» Contact Rating

Resistive load	8A 240VAC
----------------	-----------

### »» Coil Rating (DC)

Rated voltage (V)	Rated current $\pm 10\%$ at 23 °C (mA)	Coil resistance $\pm 10\%$ at 23 °C ( $\Omega$ )	Max. continuous voltage at 85 °C	Pick up voltage(Max) at 23 °C	Drop out voltage(Min) at 23 °C	Power consumption at rated voltage
3	233	12.9	150 % of rated voltage	75 % of rated voltage	5 % of rated voltage	approx. 0.7W
5	139	36				
6	118	51				
9	77.6	116				
12	58.3	206				
18	38.9	463				
24	29.2	823				
48	14.6	3291				
60	11.7	5143				
110	6.4	17286				

## »» Specification

Contact material	AgSnO alloy	
Contact resistance <sup>(1)</sup>	100mΩ Max.	
Operate time <sup>(1)</sup>	20ms Max.	
Release time <sup>(1)</sup>	15ms Max.	
Insulation resistance <sup>(1)</sup>	1000MΩ Min. (DC 500V)	
Dielectric strength <sup>(1)</sup>	Between open contact	: AC 2000V, 50/60Hz 1 min.
	Between contact and coil	: AC 4000V, 50/60Hz 1 min.
Vibration resistance	Operating extremes	10~55Hz , amplitude 1.5 mm
	Damage limits	10~55Hz , amplitude 1.5 mm
Shock resistance	Operating extremes	10G
	Damage limits	100G
Life expectancy	Mechanical	5,000,000 operations (frequency 18,000 operations/hr)
	Electrical	100,000 operations (frequency 600 operations/hr)
Operating ambient temperature	-40~+85 °C (no freezing)	
Weight	Approx. 17 g	

Note : (1) initial value

## »» Safety Approval


Certified	UL / CUL	TUV
File No.	PENDING	PENDING

## »» Safety Approval Rating

UL / CUL	TUV
8A 277VAC	8A 250VAC


# S01

## »» Outline Dimensions

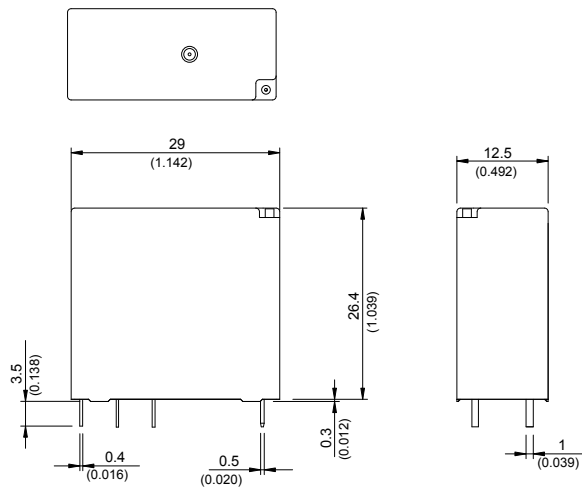


## »» Wiring Diagram BOTTOM VIEW

2C




2D



## »» PC Board Layout BOTTOM VIEW

2C

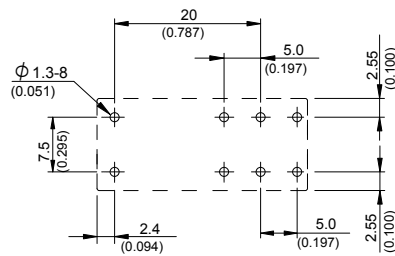

2D

